


# INTERACT AND INTERACT IV G2 INSTALLATION


## Components & Hardware



A) Interact G2, Qty. 1  
(ACT-21U Shown)



B) Clamp, Qty. 2



C) Thumb Screw, Qty. 4


## Tools Needed




**For use with:** This product fits tables .875" – 2" thick.

**Note:** A licensed electrician should make the hardwire connections.


**1-** Locate and cut the hole for the Interact G2 (4.75" x 8.38" with .25" max corner radii). Insert the Interact G2 (A) into the cutout from above.

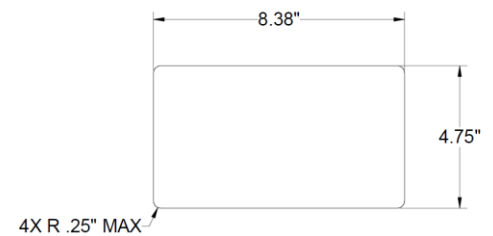

**2-** Key slots in clamps (B) engage over T-studs in Interact G2 (A) and thumb screws (C) tighten against the underside of the table. Use appropriate key slots to clamp into position (see detail A). Note: outermost key slots in clamp (B) are not used for this product.

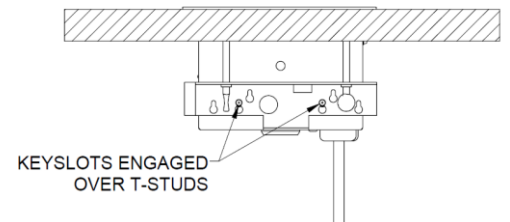

**3-** Connect all power and data cabling as needed.

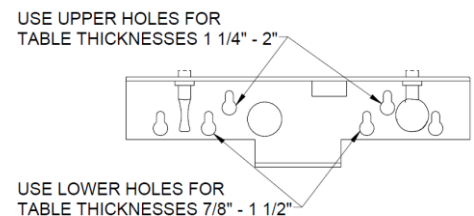

**4-** Connections for hardwire units:

Black wire – circuit hot  
White wire – circuit neutral  
Green wire – circuit ground

Detail A