

Kinetic.


high powered height adjustability




WORKSPACE 

Kinetic **Statement of Line**

Styles




2-stage Legs




3-stage Legs

Options



Feet (2 sizes)

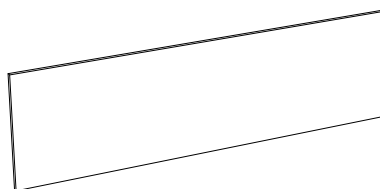


Modesty Panel


Frames



Black



Silver



White

Worksurfaces / Modesty Panel



Classic White



Continental Walnut



Landmark Wood




Grey Elm

Versi Privacy Screens


Ripple Collection (PET)



Charcoal




Stone




Ash




Natural




Honey



Avocado



Ocean




Chili

Kinetic **Features**

Frame finishes Silver, White or Black
2- or 3-stage options for multiple height ranges
C-Legs with two feet lengths to support 24" and 30" deep worksurfaces
Laminate worksurfaces available in 4 colors
Versi privacy screens available in 8 colors, 4 styles and 6 bracket options
Optional modesty panels



Motorized push button handset with 3 memory presets

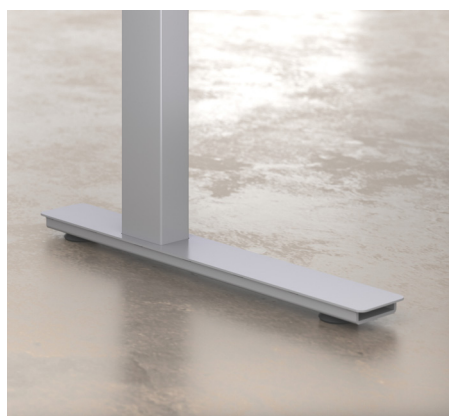

Two feet lengths to support worksurface depths




2- or 3-stage legs offer height range variability



Kinetic Specifications

Leg Styles	2- and 3-stage legs (No hole leg design: no screw on outside of frame)
Adjustable Height Range: 3-stage Legs ¹	22.6"-48.7" (575-1255mm)
Adjustable Height Range: 2-stage Legs ¹	27.7"-47.5" (704-1206mm)
Frame width extendable range	42.7" -70.85" (1085-1800mm) to fit desktop sizes 42"-72" (1200-1800mm)
Feet Sizes	C Leg feet in two sizes: 24" (600mm) and 28" (700mm)
Weight Capacity	270 lbs
Max Speed	Dual Motor with 1.5"/s (40mm/s) height adjustment
Low noise level	< 50dB with no-load condition
Power Cord Length	9'
Safety	Anti-collision safety protection
Standby power	< 0.1 W
Surface	Powder coating
Certifications	UL 962, BIFMA X5.5 (2-stage) BIFMA G1 (3-stage)

¹ Does not include worksurface.

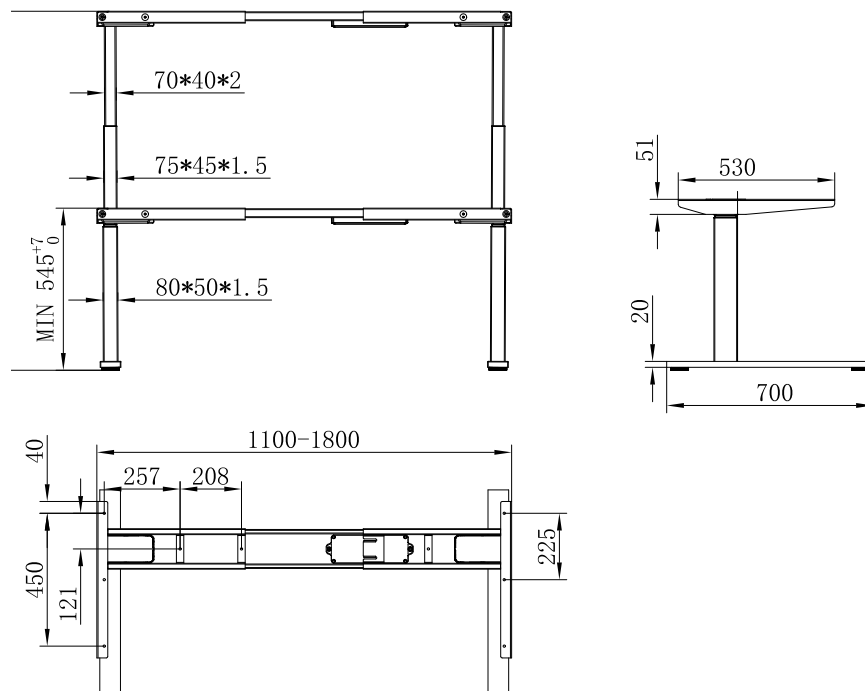

Kinetic Image Gallery

